



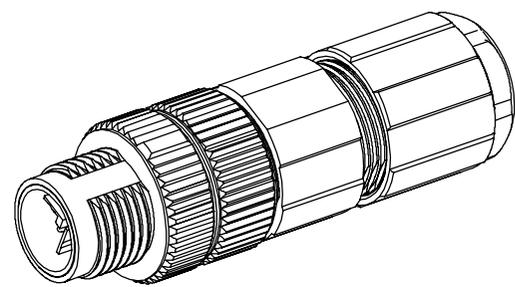



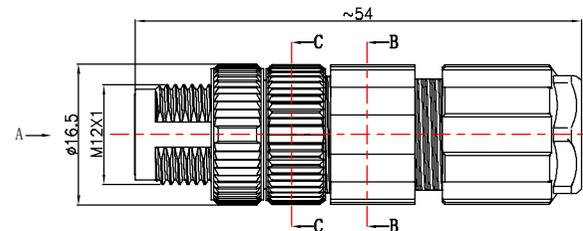


REV.	Q'TY	ECN. NO.	APR.	DATE




VIEW A

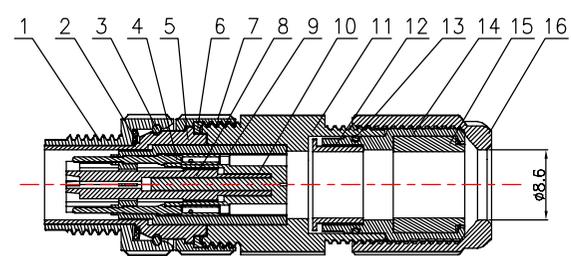

剖面图 A-A



剖面图 B-B



剖面图 C-C

技术参数

连接方式: 螺纹连接
 接线方式: 焊板
 类型: 直式插座
 编码: X型
 温度范围: -45° C ~ +85° C
 防护等级: IP67
 插拔周期: ≥100

额定电压: 60V AC/DC
 额定电流: 0.5A
 接触电阻: ≤5 mΩ
 绝缘电阻: ≥100 MΩ

所有材料均符合RoHS要求

16	15-012EM06-001	尾部螺帽	锌合金	镀亚光镍	pc	1
15	53-08085A01-001	密封套	硅胶	黑色	pc	1
14	28-012AM01-001	电缆夹	尼龙	黑色	pc	1
13	51-09008C01-001	密封圈∅10.5x∅9x0.75	硅胶	黑色	pc	1
12	17-012AC05-001	屏蔽压环	黄铜	镀镍	pc	1
11	11-012EM06-001	插头主壳体	锌合金	镀亚光镍	pc	1
10	61-012X08A01-001	M12 8芯X扣公端绝缘体	尼龙	黑色	pc	1
9	61-012X08A01-002	M12 8芯X扣公端绝缘体外套	尼龙	黑色	pc	1
8	13-012EM06-001	M12 8芯X扣公端绝缘体内套壳体	锌合金	镀亚光镍	pc	1
7	14-012EM06-003	连接外壳	锌合金	镀亚光镍	pc	1
6	52-12310A01-001	密封垫	NBR	黑色	pc	1
5	14-012EM06-002	连接壳体	锌合金	镀亚光镍	pc	1
4	32-01206B01-001	∅0.6x17.5插针	磷铜	镀金	pc	8
3	18-012FM10-001	卡环	不锈钢	钝化	pc	1
2	18-012HM04-001	波纹弹簧	锰钢	镀镍	pc	1
1	14-012EM06-001	公头连接螺帽	锌合金	镀亚光镍	pc	1
No.	ITEM NO.	Specification	Material	Treat	Unit	Q'ty

DIMENSION IN mm		DCXCONN DONGGUAN DINGWEI ELECTRONIC TECHNOLOGY Co.,Ltd.			
TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE: M12 8芯X扣冷压式公端插头			
.X±0.15	.X'±3'	DRA. Long 2018.06.10	P/N: M12-P08XMSPW10-01		DWG NO.
.XX±0.10	.X'±2'	CHK. Wu 2018.06.10	PROJ.		CUSTOMER DRAWING
.XXX±0.05	.XX'±1'	APR. Liu 2018.06.10	SIZE A4	SCALE 1:1	SHEET 1/1 REV. A